

# Suspended Substrate Stripline Filters and Multiplexers

50Ω DC to 26 GHz

## The Big Deal

- Low insertion loss
- Ultra-wide passband width
- Fast roll-off with wide stopband
- Good power handling and temperature stability
- Passband up to 26 GHz
- Stopband up to 26.5 GHz can extend to 40 GHz



## Product Overview

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss by implementing printed circuit board suspended between two parallel ground planes, providing high Q. Low insertion loss combined with wide stopband makes them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultra-broadband receivers.

Low pass, high pass, band pass, band stop, diplexer and multiplexer designs can be realized with this technology. Advanced filter design and construction can achieve stopband width greater than 6x the center frequency, and temperature stability will be better than other printed circuit realizations because the fields are mainly in the air rather than in a dielectric. The inside walls of the housing hold the circuit and prevent movement that could be caused by vibration or mechanical shock, making these designs excellent candidates for harsh operating environments.

Suspended substrate stripline filters can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

| Feature                         | Advantages   |
|---------------------------------|--|
| Low insertion loss              | Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitters |
| Fast roll-off                   | Higher selectivity results in better adjacent channel rejection and dynamic range                                |
| Wide stopband                   | Wide, spur-free stop band results in better receiver sensitivity   |
| High power handling             | Well suited for transmitter applications   |
| Excellent temperature stability | Ensures minimal variation in electrical performance across temperature   |

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Suspended substrate stripline Band Pass Filter

## ZBSS-9G-S+

50Ω 6000 to 12000 MHz



Generic photo used for illustration purposes only

CASE STYLE: WD3296  
Connectors Model  
SMA - F ZBSS-9G-S+

### Features

- Wide fractional bandwidth design of 66.7%
- 1dB typ. Insertion Loss at Center frequency
- Sharp roll-off
- High rejection floor of 90dB typ.
- Stop band up to 26.5 GHz
- Connectorized package

### Applications

- Satellite communications
- Radio Navigation
- Maritime Mobile
- Military and defense
- Electronic warfare receiver
- Wideband receivers
- Space Research

### Electrical Specifications at 25°C

| Parameter        | F#               | Frequency (MHz) | Min.          | Typ. | Max. | Unit |    |
|------------------|------------------|-----------------|---------------|------|------|------|----|
| Pass Band        | Center Frequency | Fc              | 9000          | -    | 1.0  | -    | dB |
|                  | Insertion Loss   | F1-F2           | 6000 - 12000  | -    | 1.5  | 2.5  | dB |
|                  | VSWR             | F1-F2           | 6000 - 12000  | -    | 1.5  | -    | :1 |
| Stop Band, Lower | Insertion Loss   | DC-F3           | DC - 3300     | 60   | 90   | -    | dB |
|                  |                  | F3-F4           | 3300 - 3700   | 40   | 60   | -    | dB |
|                  |                  | F4-F5           | 3700 - 4100   | 20   | 40   | -    | dB |
| Stop Band, Upper | Insertion Loss   | F6-F7           | 14200 - 15000 | 20   | 40   | -    | dB |
|                  |                  | F7-F8           | 15000 - 16500 | 40   | 60   | -    | dB |
|                  |                  | F8-F9           | 16500 - 25000 | 60   | 90   | -    | dB |
|                  |                  | F9-F10          | 25000 - 26500 | -    | 90   | -    | dB |

### Maximum Ratings


|                       |                 |
|-----------------------|-----------------|
| Operating Temperature | -40°C to 85°C   |
| Storage Temperature   | -55°C to 100°C  |
| RF Power Input        | 10W max. @ 25°C |

Permanent damage may occur if any of these limits are exceeded.


### Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) | Frequency (MHz) | Group Delay (nsec) |
|-----------------|---------------------|-----------|-----------------|--------------------|
| 10              | 102.52              | 8474.04   | 6000            | 0.69               |
| 100             | 116.83              | 15278.61  | 6300            | 0.63               |
| 1000            | 109.48              | 892.23    | 6600            | 0.60               |
| 3300            | 83.45               | 62.97     | 6900            | 0.57               |
| 3700            | 64.79               | 48.54     | 7200            | 0.55               |
| 4100            | 43.78               | 35.17     | 7500            | 0.53               |
| 4500            | 20.86               | 17.83     | 7800            | 0.52               |
| 4850            | 3.62                | 2.47      | 8100            | 0.51               |
| 6000            | 0.95                | 1.11      | 8400            | 0.51               |
| 8000            | 0.79                | 1.16      | 8700            | 0.50               |
| 9000            | 0.91                | 1.38      | 9000            | 0.49               |
| 10000           | 0.88                | 1.16      | 9300            | 0.50               |
| 12000           | 1.33                | 1.26      | 9600            | 0.50               |
| 12800           | 3.30                | 2.05      | 9900            | 0.51               |
| 13350           | 20.65               | 11.72     | 10200           | 0.51               |
| 14200           | 46.38               | 23.61     | 10500           | 0.52               |
| 15000           | 64.91               | 28.83     | 10800           | 0.54               |
| 16500           | 91.00               | 44.36     | 11100           | 0.55               |
| 25000           | 102.55              | 36.86     | 11500           | 0.59               |
| 26500           | 95.99               | 44.51     | 12000           | 0.65               |

### Functional Schematic







### Typical Frequency Response



#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

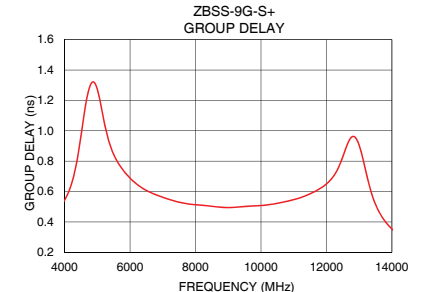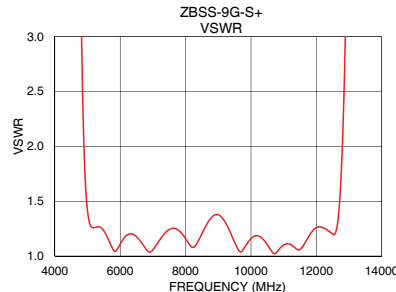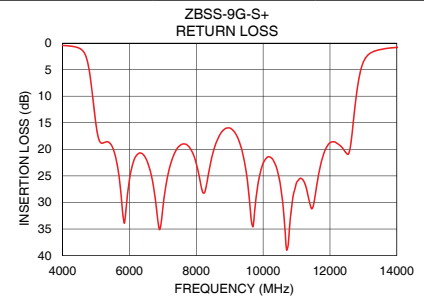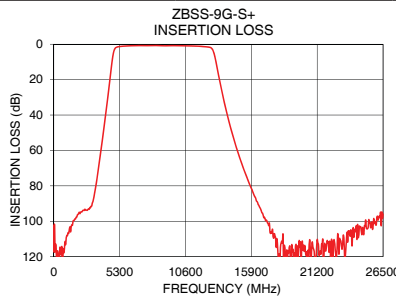

#### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Coaxial Connections

|          |            |
|----------|------------|
| PORT - 1 | SMA FEMALE |
| PORT - 2 | SMA FEMALE |

## Outline Drawing

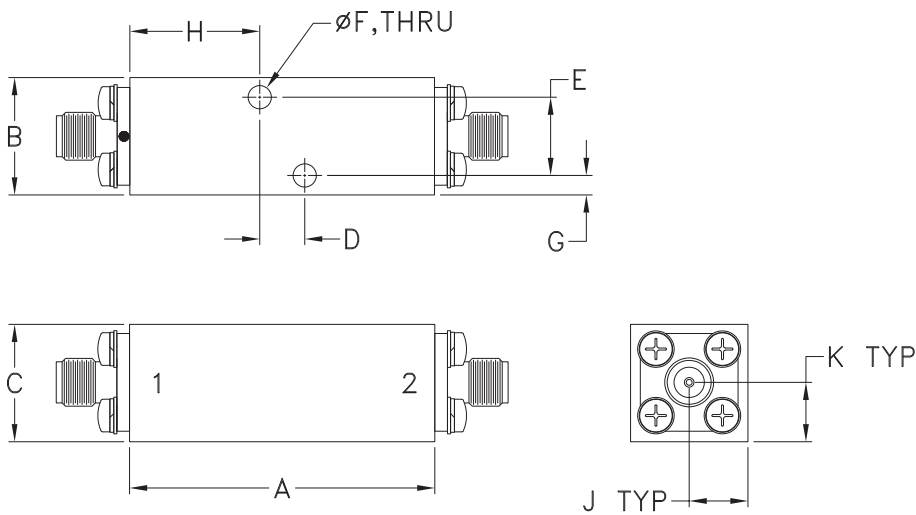

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

|      |      |      |      |       |       |
|------|------|------|------|-------|-------|
| A    | B    | C    | D    | E     | F     |
| 1.56 | .60  | .60  | .230 | .400  | .110  |
| 39.6 | 15.2 | 15.2 | 5.84 | 10.16 | 2.80  |
| G    | H    | J    | K    |       | Wt.   |
| .10  | .66  | .30  | .30  |       | grams |
| 2.5  | 16.9 | 7.6  | 7.7  |       | 72    |

Note: Please refer to case style drawing for details

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

