



Electrical specifications

Center Frequency: 2300 MHz
3 dB Bandwidth: 200 MHz
Input / Output Impedance: 50 Ohms
Passband: 2200-2400MHz
Insertion Loss @2300 MHz: ≤1.0dB
Passband Return Loss: ≥15dB
Rejection: ≥40dBc@2150MHz
Rejection 2: ≥40dBc@2450MHz
Power Handling: 25 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 5.22 x .99 x .95 in.

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

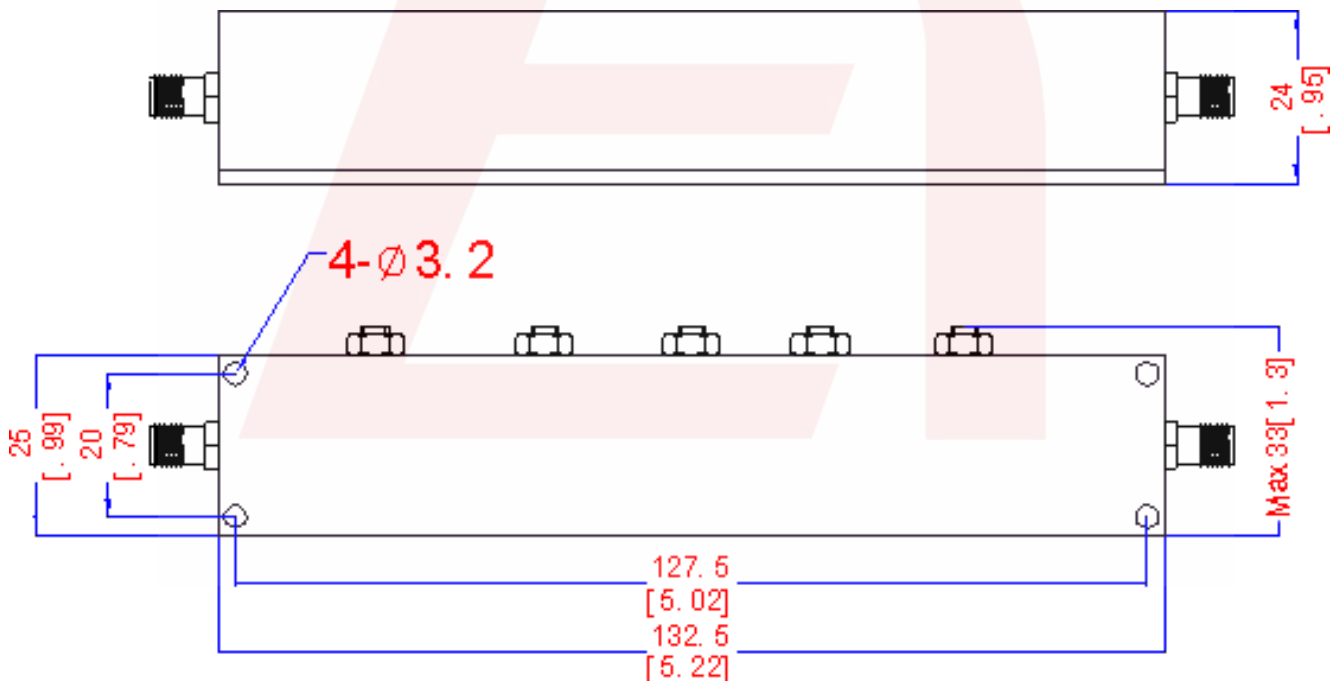



Response Plot:

7/8/2021 8:14:51 AM

